

# AN INNOVATIVE ECO-FRIENDLY TECHNIQUE TO MEASURE CHROMIUM WITH BENZOHYDRAZIDE

**Muhammad Kashif Channa**

Institute of Chemistry, Shah Abdul Latif University, Khairpur, Sindh, Pakistan [kashifphd17@gmail.com](mailto:kashifphd17@gmail.com)

**Gul Afshan Soomro**

Institute of Chemistry, Shah Abdul Latif University, Khairpur, Sindh, Pakistan

**Ghulam Abbas Shar**

Institute of Chemistry, Shah Abdul Latif University, Khairpur, Sindh, Pakistan

DOI: <https://doi.org/10.71146/kjmr101>

## Article Info

Received: 24<sup>th</sup> Oct, 2024  
Review 1: 24<sup>th</sup> Oct, 2024  
Review 2: 25<sup>th</sup> Oct, 2024  
Published: 25<sup>th</sup> Oct, 2024



## Abstract

Numerous methodologies exist for trace level analysis of Chromium (Cr) metal ions. Many of these approaches are characterized by their time-consuming nature, complexity, toxicity, and sophistication. Recently, some spectrophotometric methods have been developed that, while less sensitive and selective, offer quicker analyses for determining Cr(III) ions. We innovated suitable, swift, sensitive and selective technique for detecting Cr(III) at trace levels, utilizing Benzohydrazide (BH) as the derivatizing reagent within a 3.0% Triton X-100 surfactant system. This procedure demonstrated improved analytical characteristics. Cr-[BH]3 complex exhibited absorbance maxima at  $\lambda_{max}$  436.2 nm at pH 5. The method adhered to Lambert-Beer's law within concentration range of 0.1-4.0  $\mu\text{g/mL}$ , with a 1:3 ligand to metal ratio achieved for the Cr-[BH]3 compound. Sandell's sensitivity was calculated to be 4.9  $\text{ng/cm}^2$ , and the molar absorptivity was determined as  $\epsilon = 4.03 \times 10^4 \text{ L mol}^{-1} \text{ cm}^{-1}$ . A detection limit of 4.9  $\mu\text{g/L}$  was successfully established. This method proved highly effective for quantifying Cr(III) ions across diverse samples, including natural, biological, alloy, industrial, and ecological matrices.



This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license <https://creativecommons.org/licenses/by/4.0>

**Keywords:** Chromium, Benzohydrazide, Chelating agent, Surfactant.

## Introduction

Metals play a pivotal role in various aspects of modern society, from infrastructure and manufacturing to advanced technological applications [1]. Among them, chromium stands out as a crucial element due to its unique properties and widespread industrial uses [2]. Chromium plays a crucial role across various aspects of life, industry, and the environment due to its unique properties and diverse applications. Chromium is an essential trace element for human nutrition, playing a role in glucose metabolism and insulin regulation [3]. It is necessary for maintaining proper carbohydrate and lipid metabolism in the body [4]. Chromium compounds, such as chromium picolinate, are studied for their potential health benefits in managing conditions like diabetes. They may help improve insulin sensitivity and regulate blood sugar levels in some individuals [5].

Hexavalent chromium is highly toxic and carcinogenic [6]. Chromium deficiency disrupts normal glucose metabolism, potentially leading to insulin resistance and difficulty controlling blood sugar levels [7]. This deficiency increases the risk of developing type 2 diabetes and can also impact cardiovascular health by raising cholesterol levels and contributing to heart disease. Additionally, inadequate chromium intake may affect cognitive function and mood regulation [8]. Chronic ingestion or exposure to high levels of chromium, often through contaminated drinking water sources, has been associated with kidney damage [9]. Chromium can accumulate in the kidneys over time, impairing their function and potentially leading to kidney failure. Additionally, prolonged exposure to chromium can affect liver function, causing damage or toxicity as chromium accumulates in the liver and disrupts its metabolic processes [10].

Chromium contamination in food can occur from environmental sources or improper processing techniques [11]. Chromium can accumulate in the food chain, potentially reaching harmful levels in aquatic organisms and posing risks to ecosystems and human health [12]. Workers in industries involving chromium, such as chrome plating, welding, leather tanning, and chemical manufacturing may face potential health risks from exposure to chromium compounds [13]. Some individuals may develop allergic dermatitis upon contact with chromium-containing materials, such as in certain industrial settings or through skin exposure [14]. Chromium compounds, especially Cr(VI), can contaminate soil and water through industrial processes like electroplating, leather tanning, and chemical manufacturing [15]. Efforts to mitigate chromium pollution require stringent regulations and effective wastewater treatment methods. Chromium is a key component in stainless steel alloys, providing corrosion resistance, strength, and durability essential for construction, automotive, and aerospace industries [16]. Chromium alloys are used in medical implants and prosthetics for their biocompatibility and resistance to corrosion, ensuring long-term performance and safety in the human body. Chromium coatings protect metals from corrosion and wear, extending the lifespan of machinery and infrastructure [17]. Chromium is used in electronic components, such as circuit boards and semiconductors, due to its electrical conductivity and resistance to oxidation. Chromium-containing alloys contribute to the strength and corrosion resistance of construction materials, ensuring durability in bridges, buildings, and pipelines [18]. Chromium alloys are critical in jet engines, turbines, and automotive components due to their ability to withstand high temperatures and harsh environments [19]. Chromium's hardness,

corrosion resistance, and heat resistance make it indispensable in various industries, including aerospace, automotive, and construction. It contributes to the durability and performance of materials used in these sectors [20].

Several analytical techniques are available for analysis of chromium, including atomic absorption spectroscopy [21], Ultra violet visible spectrophotometry [22] and ICP-AES [23]. These methods often require expensive equipment and are known for their time-consuming and labor-intensive nature. Consequently, there is a growing need for innovative methods capable of accurately detecting chromium ions at very low concentrations. Spectrophotometric techniques are widely preferred due to their simplicity, precision, rapidity, and affordability of instrumentation (Korai, MB et al., 2019). Several spectrophotometric approaches for metal analysis have emerged as alternatives to traditional solvent extraction methods, utilizing micellar systems. Recently, spectrophotometric procedures with reduced sensitivity and selectivity for Cr(III) ion determination have been established. In current research work, a swift, selective and practical technique was developed for the trace analysis of Cr(III) using benzohydrazide (BH) in 3.0% Triton X-100. This technique has proven effective in accurately determining Cr(III) ions across a range of real-world samples, including foodstuffs, pharmaceuticals, biological specimens, and environmental samples.

### **Material and method**

The equipment used includes a UV-Vis spectrophotometer (Cecil CE 9500), an atomic absorption spectrometer (Perkin Elmer Analyst-800), an IR spectrometer (Hitachi),

and a pH/conductivity meter (HACH Sension156).

### ***Preparation of Reagents***

A 1000 µg/L stock solution of chromium (II) ions was meticulously prepared using high-purity salts sourced from Merck, Darmstadt, Germany and dissolved in double-distilled water. Solutions containing various metal ions were also meticulously prepared from salts to evaluate potential interferences [24].

The BH solution of  $4 \times 10^{-4}$  M was prepared by dissolving 0.0544g of BH in the minimum amount of ethyl alcohol in a 1000 mL flask, followed by addition of 3.0% Triton X-100 to reach the final volume. The 3.0% Triton X-100 solution was prepared by dissolving 3g of Triton X-100 in a 100 mL calibrated flask and adjusting the volume with distilled water. Buffers spanning pH 1 to 10 were prepared according to the methods described by Perrin (2012) [25]. This involved combining specific volumes of KCl (0.2 M) and HCl (0.2 M) for pH 1-4, volumes of CH<sub>3</sub>COOH (0.2 M) and CH<sub>3</sub>COONa (0.2 M) for pH 5-6, volumes of KH<sub>2</sub>PO<sub>4</sub> (0.1 M) and NaOH (0.1 M) for pH 7-8, and volumes of Na<sub>2</sub>B<sub>4</sub>O<sub>7</sub> (0.025 M) and HCl (0.1 M) for pH 9-10. All chemicals used were of analytical grade and sourced from Merck/Fluka, ensuring high purity.

### ***General Method for Determination of Chromium (III) Ions***

Chromium (III) ion solutions ranging from 0.06 to 10 µg/mL were prepared. To each 10 mL volumetric flask, 2 mL of Benzohydrazide (BH) reagent solution, 2 mL buffer pH 5, and 2 mL 3.0% Triton X-100 were mixed. Solution was thoroughly mixed by shaking, and deionized water was mixed to reach final

volume. Cr-[BH]<sub>3</sub> absorbance was measured at  $\lambda_{\max}$  436.2 nm using BH as the blank.

#### *Chromium (III) ions analysis from alloy*

In a process, 5.0 mL of NIST 1643 underwent digestion with 10 mL of nitric acid concentrated, 10 mL of sulphuric acid (20%), and 2 mL of hydrogen per oxide. Subsequently, the resulting solution was evaporated and reduced. Following this, the sample underwent dilution, neutralization, and filtration. In order to create a complex, the sample solutions were put into a measuring flagon and combined with 2 mL of pH 5 buffer, 3.0% Triton X-100, and Benzohydrazide (BH). The outcomes are shown in Table 4.

#### *Analysis of chromium (III) from waste-water specimen*

The sample for this study i.e. 2L of waste water was mainly collected from Sohu Kanasira, a village in District Khaipur, Sindh, Pakistan. For the digestion process, the material was filtered and combined with 2 mL of hydrogen peroxide and 4 mL of concentrated nitric acid. After that, it was pre-concentrated at roughly 110 °C, and a volume of 25 mL was created. After that, the sample was placed in a volumetric flask and 3.0% Triton X-100, 2 mL of pH 5 buffer and 2 mL of benzohydrazide (BH) were added. Cr-[BH]<sub>3</sub> absorbance was noted, as in table 3.

#### *Analysis of chromium (III) from spout water specimen*

A 1000 mL sample of tap water was taken from the hamlet of Naroo Dhoro in the district of Khaipur, Pakistan. It was then cooked in an oven for preconcentration, filtered, and combined with 2 mL of concentrated nitric acid. Ultimately, the sample was put into a calibrated bottle and combined with 2 mL of pH 5 buffer, 2 mL of benzohydrazide (BH), and 2 mL of Triton X-100 (3.0%). Cr-[BH]<sub>3</sub> absorbance were noted, as in Table 5.

#### *Analysis of Chromium (III) ions from food specimens*

2g of each Fish and cow's flesh, using microwave digestion were broken down into 10 mL of HNO<sub>3</sub> and 2 mL of H<sub>2</sub>O<sub>2</sub>. After diluting the solution with 50 millilitres of deionized water, it was filtered. Benzohydrazide (BH) 2 mL, pH 5 buffer 2 mL, 3.0% Triton X-100 2 mL, and tartrate solution 2 mL were finally put onto a calibrated flagon (Jamaluddin et al., 2014). The measured complex absorbances are shown in table 4.

#### *Analysis of Chromium (III) from pharmacological specimen*

Ultimately, 25 grams of a tablet (multi-vitamin) was pulverised and subjected to digestion using 2 mL of hydrogen peroxide and 10 mL of conc. nitric acid. The mixture was then evaporated until it was completely dry. Deionized water was added after leaching the

residues with sulphuric acid (0.5M). Lastly, the solutions were placed into a calibrated flagon, containing two millilitres each of mixed reagent BH, buffer of pH 5, tartarate solution, and Triton X-100 (3.0%). The measured complex absorbances are shown in table 3.

## Results and discussion

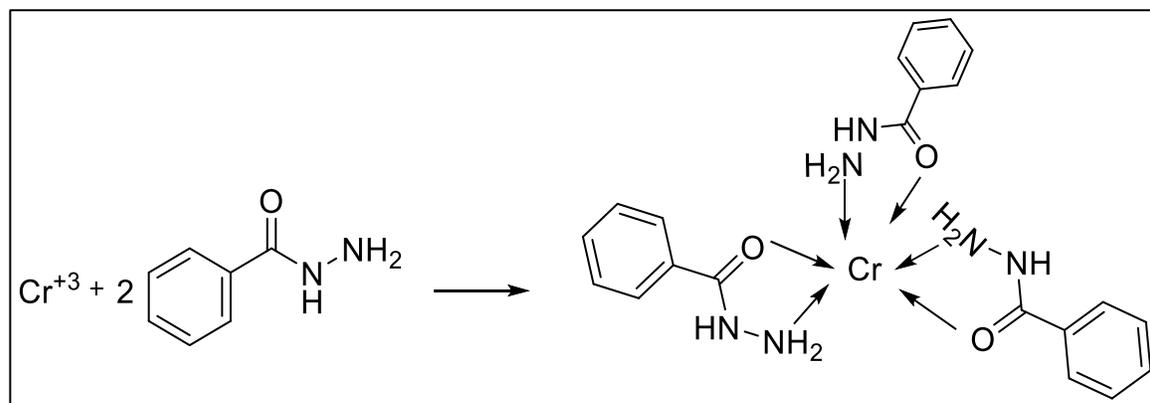


Figure 1 Proposed structure for [Benzohydrazide]-Chromium(III) complex.

In Figure 2, The reagent BH displayed absorption bands at  $\lambda_{\max}$  285.2 nm, attributed to the ( $n \rightarrow \pi^*$ ) transitions within the molecule, specifically involving the charge transfer ( $L \rightarrow LCT$ ) from the amino group ( $-NH_2$ )

The interaction between Cr(III) ions and Benzohydrazide (BH) resulted in charge transfer transitions. BH contributed electron pairs from both the oxygen of the carbonyl group ( $C=O$ ) and the nitrogen of the amino group ( $-NH_2$ ) (Fig. 1).

nitrogen and the carbonyl group ( $-C=O$ ) oxygen. These measurements were conducted in a surfactant solution containing Triton X-100 (3.0%).

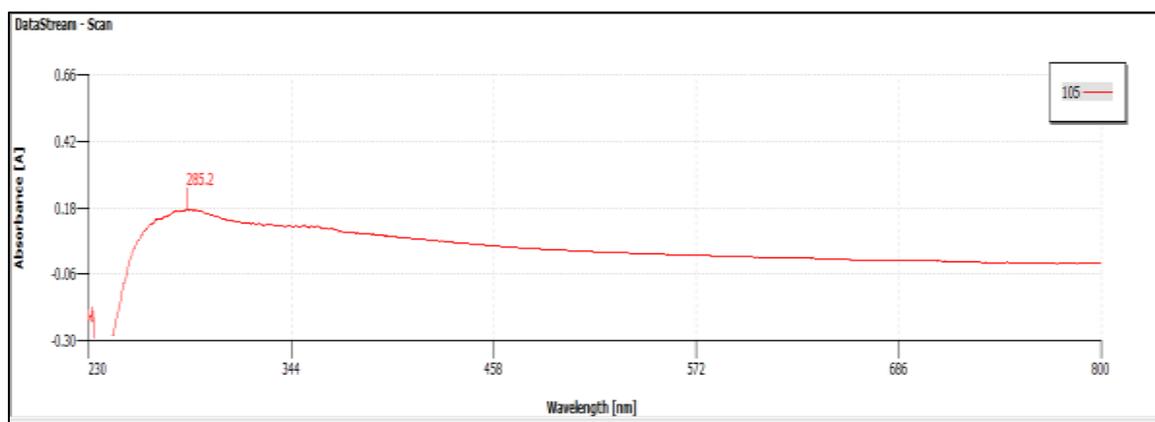


Figure 2. Benzohydrazide reagent UV/Vis spectrum at ( $\lambda_{\max}$  285.2 nm)

The absorption spectrum of  $Cr-[BH]_3$  revealed peaks at  $\lambda_{\max}$  436.2 nm, attributed to the transition ( $n \rightarrow \pi^*$ ) from BH reagent to Cr

( $L \rightarrow MCT$ ), specifically involving the amino ( $-NH_2$ ) and carbonyl ( $C=O$ ) groups, as illustrated in Figure 3. For 120 minutes, the Cr (III)-

complex remained stable and had a consistent maximum absorbance.

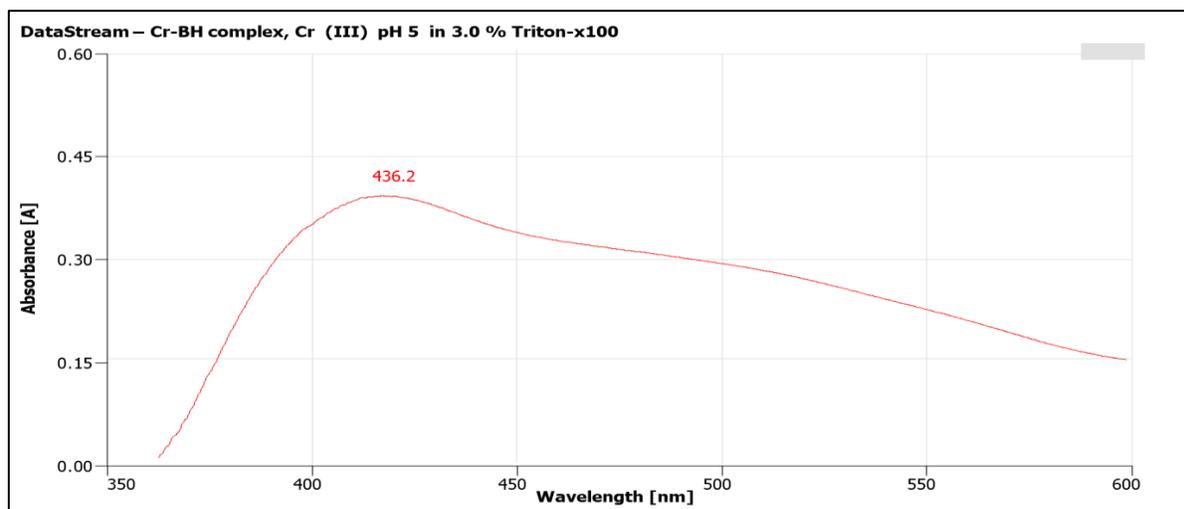


Figure 3 Absorption spectrum of Cr-BH Complex

For Cr (III) and benzohydrazide, the stoichiometric molar ratio was determined using Job's approach [26]. Plots of absorbance

vs Cr (III) for the chromium (III) complex were shown, with the equimolar mole fraction of 1:3 for Cr-[BH]<sub>3</sub> complex (Fig. 4).

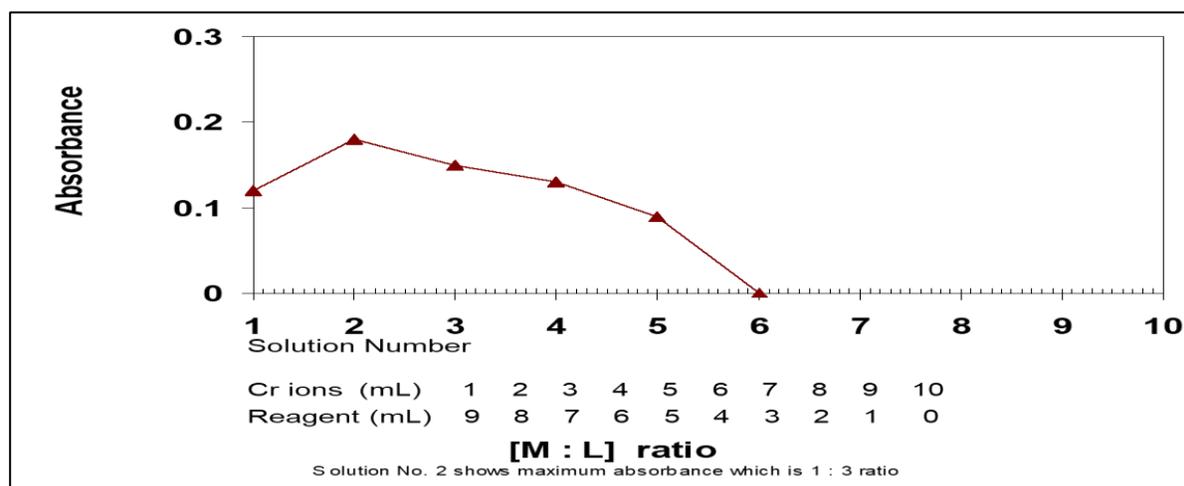


Figure 4 Influence of chromium quantities on the absorbances of Cr-[BH]<sub>3</sub>

By increasing the concentration of Benzohydrazide from  $0.5$  to  $10.0 \times 10^{-4}$  M even though keeping constant concentrations of Cr(III) at 1.0 mM, the effect of the concentration of Benzohydrazide on the Cr-[BH]<sub>3</sub> compound absorbance was observed. It

was noted that the optimal Benzohydrazide molar ratio for achieving maximum absorbance remained consistent at  $4.0 \times 10^{-4}$  M when the Cr(III) concentration was maintained at 1.0 mM. Figure 5 illustrates the optimized concentration of BH under constant Cr (1.0

mM) conditions.

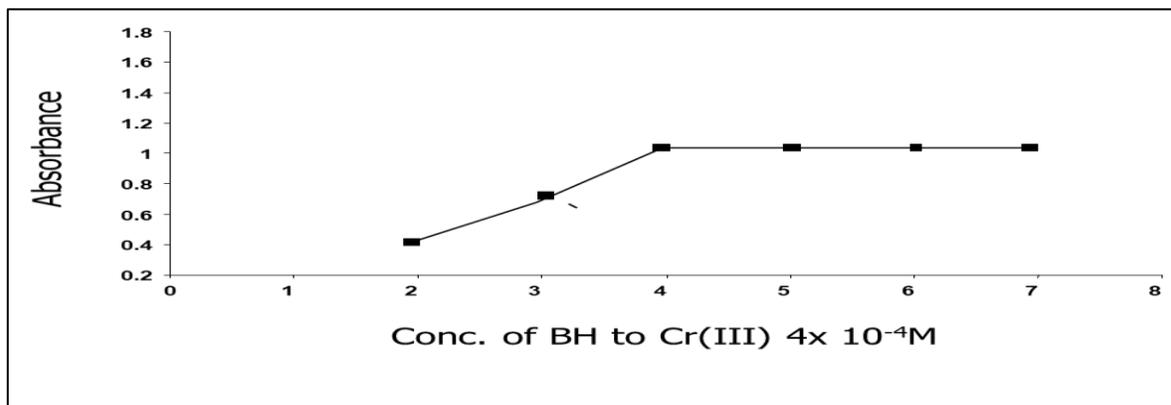


Figure 5 Influence of BH concentrations on the absorbance of Cr-BH Complex

The experiment involved mixing 2 mL of Cr(III), 2 mL of Benzohydrazide ( $4.0 \times 10^{-4} \text{M}$ ), 2 mL of buffer (pH 5), and 2 mL of Triton X-100 (3.0%) in a 10 mL calibrated flask for creation of complex. Triton X-100 (3.0%), optimized for the study and used above its critical micellar concentration, facilitated the complexation

process. pH 5 was identified as optimal for achieving consistent maximum absorption. A calibration curve was then generated from 0.1 to 4.0  $\mu\text{g/mL}$  concentrations, measured at  $\lambda_{\text{max}}$  436.2 nm, demonstrating a high correlation coefficient ( $R^2 = 0.9994$ ) as shown in Figure 6.

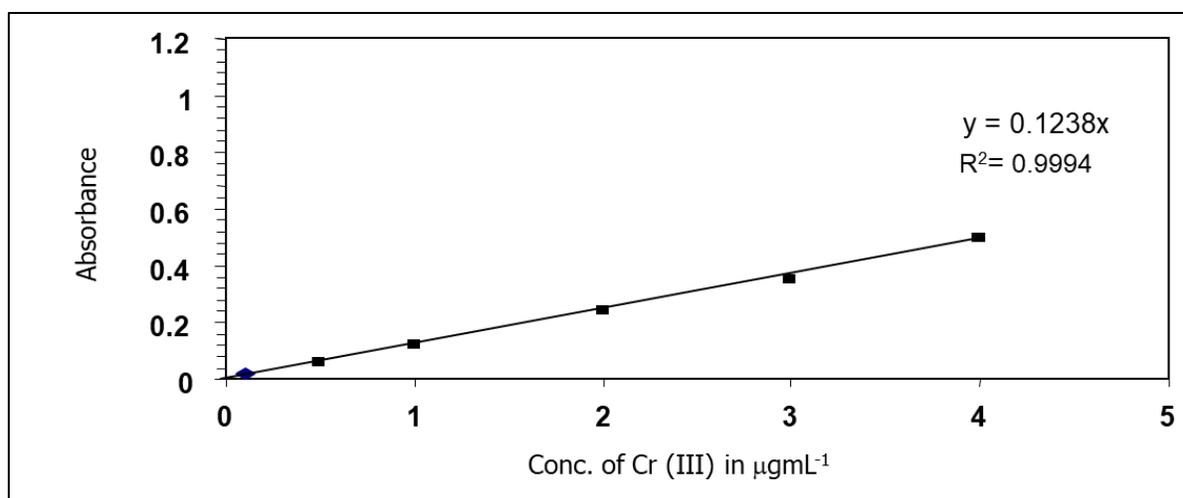


Figure 6 Calibration curve of Cr(III) -BH

The values for limit of detection, Sandell's sensitivity and coefficient of molar absorptivity were determined as  $4.9 \text{ ngmL}^{-1}$ ,  $4.9 \text{ ngcm}^{-2}$  and  $4.03 \times 10^4 \text{ mol}^{-1}\text{cm}^{-1}$  at  $\lambda_{\text{max}}$  436.2 nm, respectively, as shown in Table 1. The

improvements in selectivity and sensitivity of the proposed method over previously described extraction approaches are evident in Table 6.

<b>Parameters</b>	<b>Chromium</b>
<b>Maximum absorption (<math>\lambda_{\max}</math>)</b>	<b>436.2 nm</b>
<b>Calibration range</b>	<b>0.1-4.0 <math>\mu\text{g/mL}</math></b>
<b>Surfactant Triton X-100 (3.0%)</b>	<b>2 mL</b>
<b>Molar absorptivity</b>	<b><math>4.03 \times 10^4 \text{ mol}^{-1} \text{ cm}^{-1}</math></b>
<b>pH</b>	<b>5</b>
<b>Sandell's sensitivity</b>	<b>4.9 <math>\text{ng/cm}^2</math></b>
<b>Derivatizing reagent Benzohydrazide</b>	<b><math>4.0 \times 10^{-4} \text{ mol}^{-1} \text{ L}^{-1}</math></b>
<b>Metal-Ligand ration</b>	<b>1:3</b>
<b>Detection Limit</b>	<b>4.9 <math>\mu\text{g/L}</math></b>
<b>(R<sup>2</sup>)</b>	<b>0.9994</b>

The study examined the impact of various cations and anions on metal-chelate formation.  $\text{C}_4\text{H}_4\text{N}_2\text{O}_6$ ,  $\text{KClO}_3$ , and  $\text{KSCN}$  exhibited minimal interference and demonstrated that interference was present beyond  $800 \mu\text{g/L}^{-1}$ . And others such as lead (III), manganese (II), vanadium (III), and cadmium (II) were found to cause confirmed interference in the absorbance of complexes formed in their small

concentrations.

As masking reagents, edetic acid, ascorbic acid and dimethylglyoxime were utilized to minimize the interference caused by foreign ions [27]. The  $\text{NH}_3$  buffer masking agent effectively mitigated the varied effects of analytes on Cr(III) complex formation, as detailed in table 2.

<b>Ion/ salt</b>	<b>Cr (III) (<math>\mu\text{g/L}</math>)</b>
<b>Cd(II)</b>	2
<b>Cr(III)</b>	-
<b>Pb(II)</b>	3
<b>Mn(III)</b>	5
<b>V(III)</b>	5
<b>Al(III)</b>	10
<b>Zn(II)</b>	50
<b>KCN</b>	50
<b><math>\text{Na}_2\text{C}_2\text{O}_4</math></b>	200
<b><math>\text{Na}_2</math> citrate</b>	500
<b>Mg(II)</b>	600

### Validation of method

The validation of the proposed method involved comparing its results with those obtained from Atomic Absorption Spectroscopy (AAS), using certified reference materials and conducting a %

recovery test at a 95% CL. The accuracy and reliability of the technique were performed using certified reference materials and tap water, with results summarized in Tables 3 to 5.

*Table 3 – Analysis of chromium(III) from waste water and pharmaceutical specimens*

Samples	Metal ions	Established technique $\mu\text{gL}^{-1}$	RSD%	A.A.S technique $\mu\text{gL}^{-1}$	RSD%	Recoveries
<b>Chromium from waste water specimens</b>						
Waste water	Cr(III)	4.0	0.3	4.2	0.1	97.21%
<b>Chromium from pharmaceutical specimen</b>						
Tablet Chromium(III)-GFT (27 mg per tablet)	Cr (III)	26.95	0.4	26.96	0.3	99.81%

*Table 4 – Analysis of chromium from food, alloy specimens and certified materials*

Samples	Certified value	Found value
<b>Chromium from food specimens</b>		
Cows meat	–	0.63
Fish	–	1.89
<b>Chromium from alloy specimens</b>		
Chromel A Ni-chrome 80-20	2.0 $\mu\text{g/g}$	1.8 $\mu\text{g/g}$
<b>Chromium from certified materials</b>		
NIST- 1643	18.6 $\mu\text{g/L}$	18.2 $\mu\text{g/L}$
NIST- 1643	19.0 $\mu\text{g/L}$	18.6 $\mu\text{g/L}$

*Table 5 – The percentage recovery of predetermined metal quantities incorporated into water specimens*

Analytes	Mixed quantity ( $\mu\text{gL}^{-1}$ )	Obtained ( $\mu\text{gL}^{-1}$ )	R (%)
Cr(III)	5.50	5.34	97.09

Table 6 – Comparison of chromium investigation

Metals	Procedures	References
Cr(III)	Calibration range 0.2-2.4 $\mu\text{g/L}^{-1}$ , $\lambda_{\text{max}}$ 575 nm , $\epsilon$ $1.46 \times 10^4 \text{ mol}^{-1}\text{cm}^{-1}$	[28]
Cr(III)	in Triton X-100, $\lambda_{\text{max}}$ 295 nm , $\epsilon$ $5.4 \times 10^3 \text{ mol}^{-1}\text{cm}^{-1}$	[29]
Cr(III)	in Triton X-100, D.L. 0.117 $\mu\text{g/L}$ , $\lambda_{\text{max}}$ 586 nm , $\epsilon$ $0.244 \times 10^4 \text{ mol}^{-1}\text{cm}^{-1}$	[30]
Cr(III)	D.L. 4.9 $\mu\text{g/L}$ , $\epsilon$ $4.03 \times 10^4 \text{ mol}^{-1}\text{cm}^{-1}$ , $\lambda_{\text{max}}$ 436.2nm in 3.0% Triton X-100	Developed technique

## Conclusion

The current spectrophotometric approach for determining chromium (III) ions in minute quantities is simple, swift, sensitive, repeatable, non-extractive, and adaptable. The newly proposed technique is environmentally friendly, exhibiting enhanced sensitivity and selectivity, and has supplanted antiquated solvent extraction methods known for their time-consuming, costly, and hazardous nature. The findings demonstrate significant improvements in coefficient of molar absorptivity and sensitivity compared to previously documented methodologies, as detailed in table 6. This novel technique was effectively applied to the quantification of chromium in diverse natural, alloy and ecological specimens.

## References

1. Watari, T., K. Nansai, and K. Nakajima, *Major metals demand, supply, and environmental impacts to 2100: A critical review*. Resources, Conservation and Recycling, 2021. **164**: p. 105107.
2. Aigbe, U.O. and O.A. Osibote, *A review of hexavalent chromium removal from aqueous solutions by sorption technique using nanomaterials*. Journal of Environmental Chemical Engineering, 2020. **8**(6): p. 104503.
3. Dubey, P., V. Thakur, and M. Chattopadhyay, *Role of minerals and trace elements in diabetes and insulin resistance*. Nutrients, 2020. **12**(6): p. 1864.
4. Zhang, Y., et al., *Dietary chromium could improve growth, antioxidant capacity, chromium accumulation in tissues and expression of genes involved into glucose and lipid metabolism in juvenile mud crab Scylla paramamosain*. Aquaculture Reports, 2022. **23**: p. 101088.
5. Bisht, D., et al., *Recent Progression Of Chromium And Its Salts For Combating In Kinds Of Human Metabolic Disorder And Diseases*. Journal of Namibian Studies: History Politics Culture, 2023. **38**: p. 1384-1401.
6. Monga, A., A.B. Fulke, and D. Dasgupta, *Recent developments in essentiality of trivalent chromium and toxicity of hexavalent chromium: implications on human health and remediation strategies*. Journal of Hazardous Materials Advances, 2022. **7**: p. 100113.
7. Zarczynska, K. and S. Krzebietke, *The effect of chromium on ruminant health*. Journal of Elementology, 2020. **25**(3).
8. Akhtar, A. and S.P. Sah, *Chromium and Alzheimer's disease*, in *Vitamins and Minerals in Neurological Disorders*. 2023, Elsevier. p. 87-104.
9. Tsuchiyama, T., et al., *Increased levels of renal damage biomarkers caused by*

- excess exposure to trivalent chromium in workers in tanneries.* Environmental Research, 2020. **188**: p. 109770.
10. Mohamed, A.A.-R., et al., *Effect of hexavalent chromium exposure on the liver and kidney tissues related to the expression of CYP450 and GST genes of Oreochromis niloticus fish: Role of curcumin supplemented diet.* Ecotoxicology and environmental safety, 2020. **188**: p. 109890.
  11. Prasad, S., et al., *Chromium contamination and effect on environmental health and its remediation: A sustainable approaches.* Journal of Environmental Management, 2021. **285**: p. 112174.
  12. Sonone, S.S., et al., *Water contamination by heavy metals and their toxic effect on aquaculture and human health through food Chain.* Lett. Appl. NanoBioScience, 2020. **10**(2): p. 2148-2166.
  13. Dubey, R., P. Verma, and S. Kumar, *Cr (III) genotoxicity and oxidative stress: An occupational health risk for leather tannery workers of South Asian developing countries.* Toxicology and Industrial Health, 2022. **38**(2): p. 112-126.
  14. Hedberg, Y.S., *Chromium and leather: a review on the chemistry of relevance for allergic contact dermatitis to chromium.* Journal of Leather Science and Engineering, 2020. **2**: p. 1-15.
  15. Bakshi, A. and A.K. Panigrahi, *Chromium contamination in soil and its bioremediation: an overview.* Advances in Bioremediation and Phytoremediation for Sustainable Soil Management: Principles, Monitoring and Remediation, 2022: p. 229-248.
  16. San-Martin, D., et al., *Stainless Steels. High-Performance Ferrous Alloys*, 2021: p. 459-566.
  17. Sharun, V., et al., *Study on developments in protection coating techniques for steel.* Advances in Materials Science and Engineering, 2022. **2022**.
  18. Bustillo Revuelta, M. and M. Bustillo Revuelta, *Metals and Alloys. Construction Materials: Geology, Production and Applications*, 2021: p. 435-475.
  19. Grilli, M.L., et al., *Critical raw materials saving by protective coatings under extreme conditions: A review of last trends in alloys and coatings for aerospace engine applications.* Materials, 2021. **14**(7): p. 1656.
  20. Pokorny, P., P. Tej, and P. Szlag, *Chromate conversion coatings and their current application.* Metalurgija, 2016. **55**(2): p. 253-256.
  21. Gilbert, T.R. and A.M. Clay, *Determination of chromium in sea water by atomic absorption spectrometry.* Analytica Chimica Acta, 1973. **67**(2): p. 289-295.
  22. Haukka, S., *Determination of chromium in catalysts by ultraviolet/visible spectrophotometry.* Analyst, 1991. **116**(10): p. 1055-1057.
  23. Tsanaktsidou, E. and G. Zachariadis, *Titanium and chromium determination in feedstuffs using ICP-AES technique.* Separations, 2019. **7**(1): p. 1.
  24. Korai, M.A., et al., *Quick and Green Procedure for the Quantification of Chromium in an Anionic Surfactant System.* Kemija u Industriji, 2024. **73**.
  25. Perrin, D., *Buffers for pH and metal ion control.* 2012: Springer Science & Business Media.
  26. Korai, M.B., et al., *An inimitable and ecological pleasant technique for the assessment of trace amount of copper (II) in tangible samples with new complexing reagent.* Journal of the Indian Chemical Society, 2022. **99**(4): p. 100360.
  27. Rajni, R. and G. Usha, *Simultaneous determination of zinc (II) and cobalt (II) by first order derivative spectrophotometry in triton X-100 micellar media.* Research Journal of Chemical Sciences-ISSN, 2012. **2231**: p. 606X.

28. Rathaiah, G.V. and M.C. Eshwar, *Rapid spectrophotometric determination of chromium(iii) with 1-(2-thiazolylazo)-2-naphthol in presence of surfactant*. Bulletin of the Chemical Society of Japan, 1985. **58**: p. 2447-2448.
29. Ghaedi, M., E. Asadpour, and A. Vafaie, *Sensitized spectrophotometric determination of Cr (III) ion for speciation of chromium ion in surfactant media using  $\alpha$ -benzoin oxime*. Spectrochimica Acta Part A: Molecular and Biomolecular Spectroscopy, 2006. **63**(1): p. 182-188.
30. Ameer, H.A.H.A. and A.F. Hussain, *Spectrophotometric Determination of Micro Amount of Chromium (III) Using Sodium 4-((4, 5-diphenyl-imidazol-2-yl) diazenyl)-3-hydroxynaphthalene-1-sulfonate in the Presence of Surfactant, Study of Thermodynamic Functions and Their Analytical Applications*. Baghdad Science Journal, 2023. **20**(4): p. 1331-1331.